

User's Manual  
for the  
IHV-745E Single Board Computer with LCD/CRT & Ethernet

---

MCSI PART NO. 88800 IHV-745E  
All-In-One Single Board Computers  
For Industrial/Embedded Systems Applications

MICRO COMPUTER SPECIALISTS, INC.  
*"The Embedded PC Specialists"*  
1070 Joshua Way  
Vista, CA 92083  
U.S.A.

Voice: (760) 598-2177 - Fax: (760) 598-2450  
email: [mcsi@mcsi1.com](mailto:mcsi@mcsi1.com) WebSite: <http://www.mcsi1.com>

Revised December 31, 1999  
Revision 1.3

Changes are made periodically to the information contained herein; these changes will be incorporated into new editions of this document.

Requests for copies of this publication or the product(s) which it describes should be made to MCSI.

While every effort has been made to insure that this document and its accompanying product(s) are free from defects, MCSI, its distributors, representatives, and employees shall not be responsible for any loss of profit or any other commercial damage including, but not limited to, special, incidental, consequential, or other damages occasioned by the use of this product(s).

In the event of defect the buyer's sole recourse is to receive a refund or replacement unit at MCSI's discretion if notified within the time period covered by the product warranty.

©1999 MCSI Micro Computer Specialists, Inc. All Rights Reserved.  
PROMDISK is a registered trademark of Micro Computer Specialists, Inc.  
Pentium is a registered trademark of Intel Corporation  
IBM is a registered trademark of International Business Machines Corporation.  
PC/XT & PC/AT are registered trademarks of International Business Machines Corporation  
MS-DOS is a registered trademark of Microsoft Corporation.  
All other trademarks are the properties of their respective holders.

## PREFACE

---

This manual provides information about the MCSI IHV-745E All-In-One Single Board Computer. This information is intended for users who must implement IBM PC/AT compatible computer solutions to a wide variety of applications which cannot be satisfied using conventional desktop computers. This manual assumes that the reader has a good understanding of MS-DOS and the standard IBM PC/AT compatible architecture. For more information on the IBM PC compatible hardware and software architecture, refer to any of the many books available on the subject. A few suggestions are listed below:

- *Advanced MS-DOS Programming*, Microsoft Press
- *Programmers Guide to the IBM PC*, Microsoft Press
- *Programming the 80386*, Sybex
- *Undocumented DOS*, Addison Wesley

## INVENTORY CHECKLIST

---

The complete IHV-745E All-In-One Single Board Computer package consists of the following:

IHV-745E All-In-One Single Board Computer  
LCD/CRT and Ethernet Drivers and Software Utilities Diskette  
PROMDISK-Chip Software Utilities with ROM-DOS ver 6.22 (optional)  
This Manual

If any of the above is missing or appears to be damaged, inform MCSI immediately.



# Table of Contents

---

Section 1 - Introduction	1
Features	1
Section 2 - System Description	2
Processor	2
System Memory (DRAM)	2
Cache Memory	2
DMA Controller	3
Interrupt Controller	3
Timers	4
Clock/Calendar and CMOS RAM	4
Keyboard Port	4
Mouse Port	4
Speaker Port	4
Reset Switch	4
Printer Port	5
Serial Ports	5
Floppy Disk Port	5
IDE Hard Disk Port	5
VGA Display Port	5
Ethernet Port	6
Optional PROMDISK-Chip Disk Emulator	6
Flash EPROM BIOS	6
Universal Serial Bus Port	6
Section 3 - Setup	7
Section 4 - Using the PROMDISK-Chip Disk Emulator	8
Using ROM-DOS and Other Disk Operating Systems	8
PROMDISK Low Level Format	8
Section 5 - Installation	9
Installing the SIMMs	9
Installing the CPU	9
Installing the PROMDISK-Chip	9
Completing the Installation	10
Appendix A - Specifications	11
Appendix B - Board Outline	12
Appendix C - Memory and I/O Maps	13
Appendix D - Connectors	14
Appendix E - Configuration Jumpers	20
Appendix F - BIOS Error Beep Codes	22
Appendix G - List of Flat Panel Types Supported	23



## SECTION 1 - INTRODUCTION

---

The MCSI IHV-745E Pentium/MMX All-In-One Single Board Computer (SBC) contains all the basic elements found in a high-performance IBM PC/AT compatible desktop computer system plus some unique features which make it ideally suited for industrial applications. The most outstanding features include: An optional 32MB PROMDISK-Chip™ Disk Emulator, a PCI EIDE hard disk port to support four EIDE drives, a high performance PCI VGA/LCD Video controller and graphics accelerator, a high performance multi-I/O controller, and a 10/100Mbps Ethernet Port. The board uses the ALI M1531/M1543 Chipset which is PCI 2.1 compliant, the Chips & Technology 65555 VGA/LCD controller, and the Realtek RTL8139 Ethernet controller. The multi-I/O controller includes: dual 16C550 UARTs, a floppy port, and a SPP/EPP/ECP multi-mode bi-directional parallel port. The optional PROMDISK-Chip Disk Emulator comes complete with ROM-DOS version 6.22, making it ideal for embedded diskless applications. The IHV-745E Pentium SBC was specifically designed to operate in extreme industrial environments, and has an operating temperature range of 0° to 60°C.

The IHV-745E SBC is fully compatible with the IBM PC/AT ISA Bus which means virtually all the software written for the IBM PC/AT will run on the IHV-745E SBC.

### FEATURES

A complete list of features is listed below:

- IBM PC/AT Compatible Plug-in Computer
- Supports 233MHz Pentium/MMX, AMD K6-2 and Cyrix 6x86 type CPUs up to 350MHz
- Includes Zero Insertion CPU Socket
- ALI M1531/M1543 Chip Set
- AMI Plug-n-Play Flash BIOS
- Passive Backplane Architecture
- Integral PCI VGA/LCD Controller and Graphics Accelerator
- 128M-Byte FPM or EDO DRAM System Memory (2-72pin SIMMs)
- 512KB Pipelined Burst Mode Secondary Cache
- C&T 65555 VGA/LCD Controller and 2MB Video RAM
- 10/100Mbps Auto-Sensing Ethernet Port Supports IEEE 802.3u 100BASE-TX Standard
- PROMDISK-Chip Socket Supports 32MB PROMDISK-Chip Disk Emulator
- Dual Floppy Disk Port Supports Two 3.5" or 5.25" Drives up to 2.88M-bytes
- PCI Extended IDE Hard Disk Port supports up to Four Drives
- PS2/AT Compatible Keyboard Port
- PS2 Compatible Mouse Port
- Two High Speed 16C550 Compatible RS-232 Serial Ports
- Universal Serial Bus Port for future expansion
- Multimode Bi-directional Parallel Printer Port
- Clock/Calendar with Battery Back-up
- Low Power CMOS Design
- Half Size AT Plug-in Multilayer Board for Low EMI and High Reliability
- On-board Mini Speaker
- Optional External Reset
- Optional *Datalight* ROM-DOS 6.22 Operating System

## SECTION 2 - SYSTEM DESCRIPTION

---

The following sections describe the major system features of the IHV-745E All-In-One Single Board Computer.

### PROCESSOR

The IHV-745E Pentium SBC supports 100MHz to 233MHz Pentium/MMX, and the AMD K6-2 processor up to 350MHz. It also supports the Cyrix 6x86MX-PR266. The Pentium microprocessor includes an on-chip 16K-byte unified instruction cache, a 16K-byte data cache, an internal high performance math co-processor, and an enhanced 64-bit data bus. The on-board jumper selectable clock generator and ZIF CPU socket makes upgrading to a higher performance CPU easy. Some of the distinctive features of the processors include:

- 64-bit External Data Bus
- 32-bit Internal Architecture
- 128M-byte Directly Addressable Memory Space
- Internal 14 Word by 32-bit Register Set
- Separate 8K-byte Data and Cache Memories (16K for MMX)
- On-chip Pipelined Floating Point Processor
- Integrated Memory Manager

### SYSTEM MEMORY (DRAM)

The IHV-745E Pentium SBC features a shared memory which supports up to 128M-bytes of dynamic random access memory (DRAM) organized as two banks of 32Mx36 including four parity bits. The board will support either standard fast page mode or high performance EDO DRAM. The memory is configured using two single in-line memory module sockets, which will accept 72-pin single in-line memory modules (SIMMs) organized as 1MB, 2MB, 4MB, 8MB, 16MB, 32MB, or 64MB with a maximum access time of 60ns. The following table demonstrates *some of the most common memory configurations*.

**Typical Memory Configuration Table**

Total Memory	SIMM1	SIMM2
4M	1Mx36	Not Installed
8M	1Mx36	1Mx36
8M	2Mx36	Not Installed
16M	2Mx36	2Mx36
16M	4Mx36	Not Installed
32M	4Mx36	4Mx36
32M	8Mx36	Not Installed
64M	8Mx36	8Mx36
64M	16Mx36	Not Installed
128M	16Mx36	16Mx36

### CACHE MEMORY

The IHV-745E SBC includes 512K-bytes of pipelined burst mode cache memory for high speed access to blocks of data most recently read from main memory, including buffered data from the disk and video memory. The cache memory will significantly increase system performance over that of a conventional non-cached system.



## DMA CONTROLLER

The IHV-745E SBC memory refresh and DMA functions are included in the System Controller chip which includes the equivalence of two 82C37 DMA controllers. The two DMA controllers are cascaded to provide four DMA channels for transfers to 8-bit peripherals (DMA1) and three channels for transfers to 16-bit peripherals (DMA2). DMA2 Channel 0 provides the cascade interconnection for the two DMA devices thereby maintaining IBM PC/AT compatibility. The DMA channel assignments are listed below:

DMA Channel 0: Not Used (8-bit)  
DMA Channel 1: Alternate for Multi-mode Parallel Port (8-bit)  
DMA Channel 2: Floppy Disk (8-bit)  
DMA Channel 3: Multi-mode Parallel Port (8-bit)  
DMA Channel 5: Not Used (16-bit)  
DMA Channel 6: Not Used (16-bit)  
DMA Channel 7: Not Used (16-bit)

The DMA request (DRQx) and acknowledge (DACKx/) lines are available on the P1 98-pin edge connector.

## INTERRUPT CONTROLLER

The IHV-745E SBC has the equivalence of two 82C59A interrupt controllers included in the System Controller chip. The controllers accept requests from peripherals, resolve priorities on pending interrupts and interrupts in service, interrupt the CPU, and provide the vector address of the interrupt service routine. The two interrupt controllers are cascaded in a fashion compatible with the IBM PC/AT. The interrupt priority and assignments are shown below in descending order of priority:

<b>Highest</b>	IOCHCK/	Parity Check (Non-maskable)
	IRQ0	System Timer (Not Available)
	IRQ1	Keyboard (Not Available)
	IRQ8	Real Time Clock (Not Available)
	IRQ9	VGA Controller
	IRQ10	Not Used
	IRQ11	Alternate for Serial Port 2
	IRQ12	Alternate for Serial Port 1
	IRQ13	Co-processor (Not Available)
	IRQ14	Not Used
	IRQ15	Not Used
	IRQ3	Serial Port 2
	IRQ4	Serial Port 1
	IRQ5	Alternate for Parallel Port
	IRQ6	Floppy Disk Controller
<b>Lowest</b>	IRQ7	Parallel Port

The interrupt request lines IRQx and IOCHCK/ are available on the 98-pin edge connector except as noted above.

## **TIMERS**

The IHV-745E SBC has the equivalence of an 82C54 Programmable Timer included in the System Controller chip. The 82C54 is a three channel Programmable Counter/Timer chip. The three timers are driven by a 1.19MHz clock source derived from the on-board 14.31818MHz crystal oscillator. The three timers are used as follows:

TIMER Channel 0: System Timer  
TIMER Channel 1: Timer for DRAM refresh  
TIMER Channel 2: Tone Generation for Audio

## **CLOCK/CALENDAR AND CMOS RAM**

The IHV-745E SBC includes a Dallas Semiconductor DS12887 compatible real time clock/calendar with 128 bytes of CMOS RAM and internal Lithium battery which provides over 10 years of data retention when the system power is off.

The 128 byte CMOS RAM consists of 14 bytes used by the clock/calendar, and 114 bytes used by the system BIOS.

Should your CMOS become corrupted, i.e. loss of battery power or accidentally clobbered, strange errors may occur while attempting to run your programs. A jumper is provided to clear the CMOS memory, refer to Section 3.0 for instructions on resetting the initial SETUP values.

## **KEYBOARD PORT**

The IHV-745E SBC contains an IBM PC/AT compatible keyboard controller for interfacing to a generic IBM PC/AT compatible keyboard. The keyboard controller assembles the serial data from the keyboard into bytes and interrupts the CPU via IRQ1 after each byte is ready to be read. The IRQ1 service routine reads port 60H to get the keyboard scan code and acknowledges by sending a positive pulse to port 61H to clear the interrupt for the next byte. Refer to Appendix D for the keyboard connector location and pin assignments.

## **MOUSE PORT**

The IHV-745E SBC contains an IBM PS2 compatible mouse port for interfacing to a generic serial mouse. The mouse port controller assembles the serial data from the mouse into bytes and interrupts the CPU via IRQ1 after each byte is ready to be read. The IRQ1 service routine reads port 60H to get the scan code and acknowledges by sending a positive pulse to port 61H to clear the interrupt for the next byte. Refer to Appendix D for the mouse port connector location and pin assignments.

## **SPEAKER PORT**

The IHV-745E SBC contains an on-board sub-miniature audio speaker to provide audio interface to the user. Because of the small size of the speaker, the sound output is much reduced over that of the larger speaker found in most desktop computers. A connector is provided to connect an external speaker if the sound output is not sufficient. Refer to Appendix D for the speaker port connector location and pin assignments.

## **RESET SWITCH**

The IHV-745E SBC includes an on-board power detector and power on reset circuit to reset the computer after power is applied, and to hold the computer reset during low power, brown-out conditions. In addition, there are provisions for connecting an external, normally open, push button reset switch. Refer to Appendix D for the reset switch connector location and pin assignments.

## PRINTER PORT

The IHV-745E SBC contains a multimode parallel port which has the equivalence of an IBM PC/AT Parallel Printer Port. The multimode parallel printer port supports the PS/2 type bi-directional parallel port (SPP), the enhanced parallel port (EPP), and the extended capabilities port (ECP) parallel port modes. The port can be configured as a standard IBM PC/AT compatible LPT1, LPT2, or LPT3 printer port, or disabled completely using the CMOS Setup utility. Refer to Appendix D for the connector location and pin assignments.

## SERIAL PORTS

The IHV-745E SBC has the equivalence of two NC16C550 UARTs. The two UARTs can be configured as standard IBM PC/AT RS-232C compatible COM1, COM2, COM3, or COM4 serial ports or individually disabled using the CMOS Setup utility. The data rates are independently programmable up to 115.2K baud. Refer to Appendix D for the connector location and pin assignments.

## FLOPPY DISK PORT

The IHV-745E SBC contains an IBM PC/AT compatible dual floppy disk port with the equivalence of an NEC PD72056B Floppy Disk Controller, an on-chip digital data separator, and an IBM PC/AT compatible floppy disk adapter bus interface circuit. The Floppy Disk Port can be disabled by using the CMOS Setup utility. An on-chip digital data separator provides optimum performance with the following disk drive types:

5.25"	360K Double-Sided
3.5"	720K High Capacity
5.25"	1.2M High Capacity
3.5"	1.44M High Density
3.5"	2.88M High Density

Refer to Appendix D for the connector location and pin assignments.

## IDE HARD DISK PORT

The IHV-745E SBC contains a PCI Extended Integrated Drive Electronics (IDE) Port which directly interfaces to two hard disk drives with embedded controllers. The IDE Disk Port can be disabled using the CMOS Setup utility. Refer to Appendix D for the connector location and pin assignments.

## VGA DISPLAY PORT

The IHV-745E SBC includes a Chips & Technology 65555 PCI VGA/LCD display controller and graphic accelerator which interfaces directly to the local on-board PCI bus. The VGA display port is fully compatible with IBM VGA, EGA, CGA, and MDA display adapters, and provides improved performance and additional functionality. The board includes 2M-bytes of high speed video memory. The VGA display controller supports the following display resolutions:

1280x1024, 256 Colors
1024x768, 64K Colors
800x600, 16M Colors

The VGA controller is designed to support most popular flat panel displays and can provide simultaneous operation for most CRT/flat panel configurations. The VGA BIOS supports 16 of the most common LCD display types. The supported flat panel display types are listed in Appendix G. The VGA BIOS must be customized specifically to meet the requirements of the individual display not supported. Drivers and programming information can be obtained directly from C&T's Website at <http://www.chips.com>.

## **ETHERNET PORT**

The IHV-745E SBC contains a Realtek RTL8139 highly integrated single-chip Fast Ethernet controller. The RTL8139 provides 10Mbps and 100Mbps auto-sensing operation, PCI bus master capability, and full compliance with IEEE 802.3u 100Base-TX specifications. The RTL8139 keeps network maintenance cost low and eliminates usage barriers. It also supports full-duplex operation, making possible 200Mbps of bandwidth. Refer to Appendix D for connector location and pin assignments. For more information on the Realtek Ethernet controller contact their web site at <http://www.realtek.com.tw>.

## **OPTIONAL PROMDISK-CHIP DISK EMULATOR**

The IHV-745E includes a 32 pin socket designed to accept the MCSI PROMDISK-Chip. The PROMDISK-Chip Disk Emulator is a unique Flash Memory array which emulates a bootable read/write hard disk drive. The PROMDISK-Chip is offered in 4MB, 8MB, 16MB, and 32MB capacities and comes complete with ROM-DOS version 6.22 installed. The PROMDISK-Chip occupies an 8K block of memory space above 640K, whose starting address is selected by jumper JP36. The PROMDISK-Chip uses the Datalight FlashFx<sup>®</sup> integrated Flash File System and boot utilities.

The FlashFx File System and ROM-DOS allow the PROMDISK-Chip to operate as a non-volatile Read/Write disk drive. This means that you can list directories, copy files, and read and write the Flash memory on PROMDISK-Chip through standard DOS interrupts and commands.

## **FLASH EPROM BIOS**

The IHV-745E SBC contains a 128KB Flash EPROM which contains the AMI Plug-n-Play system BIOS and C&T video BIOS. The Flash EPROM can be programmed on-board with the programming software utility when a new updated version of the BIOS is released.

## **UNIVERSAL SERIAL BUS PORT**

The IHV-745E SBC contains a Universal Serial Bus Port for the future I/O expansion bus.

## SECTION 3 - SETUP

---

The IHV-745E SBC uses the latest AMI Plug-n-Play BIOS which contains an internal Setup Utility for configuring the system. The BIOS includes a graphical user interface, and a new system configuration utility, as well as all the features of the standard BIOS. The system configuration settings are stored in the on-board CMOS memory which is backed up by a Lithium battery. Should your CMOS become corrupted, i.e. loss of battery power or accidentally clobbered, strange errors may occur while attempting to run your programs. A jumper at CN34 has been provided to force the BIOS to use its internal default SETUP values. This is accomplished by first removing power from the IHV-745E and momentarily interrupting the battery power to the system controller chip. To interrupt the battery power, install a shunt on pins 3 & 4 momentarily (the "Clear CMOS" position). After waiting a few seconds, remove the shunt jumper from pins 3 & 4, and install on pins 2 & 3.

The Setup Utility can be invoked by first causing a cold boot (reset) or a warm boot (**Cntrl Alt Del**) and pressing the **Del** key when instructed. This will cause the memory diagnostics to be aborted and the Setup Utility to display the MAIN SETUP MENU. Using the  $\rightarrow\uparrow\downarrow\leftarrow$  cursor keys, move the highlighted bar to the option you wish to modify and then press **Enter** to select it. When in the MAIN SETUP MENU, the **F2** key is used to select the colors used in the setup screens, and the **F10** key is used to save the changes before exiting the Setup Utility. The **Esc** key may be used to exit the Setup Utility without saving the changes. The **PgUp** and **PgDn** keys are used to scroll through the selections for a given setting. **PgUp** is also used to decrease the setting and **PgDn** to increase the setting. In addition, you may also enter the setup utility directly by pressing the **Cntrl Alt Esc** simultaneously.

After making the desired selections from the various setup menus, you can save your selections by pressing the **F10** key or by selecting the appropriate selection from the MAIN SETUP MENU.

### Notes:

1. The user should be aware that improper selection of certain values in the CHIPSET, POWER MANAGEMENT, and PNP/PCI selections may cause unpredictable results. If this occurs select the AUTO-CONFIGURATION WITH FAILSAFE DEFAULTS from the MAIN SETUP MENU and then press the **F10** to save and exit.

## *SECTION 4 - USING THE PROMDISK-CHIP DISK EMULATOR*

---

The IHV-745E SBC includes a 32-pin socket which supports the MCSI PROMDISK-Chip disk emulator which operates as a Read/Write fixed disk drive. The paragraphs that follow describe how to use the optional PROMDISK-Chip.

### **USING ROM-DOS AND OTHER DISK OPERATING SYSTEMS**

The PROMDISK-Chip has been pre-configured at the factory with the latest version of the Datalight ROM-DOS disk operating system. In addition, a current copy of the operating system is supplied on a floppy diskette.

If the operating system is accidentally erased from the PROMDISK-Chip it may be restored using the SYS command. The DOS format utility should not be used to restore the operating system.

To change the operating system version or type you should simply use the equivalent DOS SYS command to transfer the operating system.

### **PROMDISK LOW LEVEL FORMAT**

The Flash memory contained on the PROMDISK-Chip board was initialized with the Datalight CardTrick low level format at the factory. During normal operation the Flash memory should never require reformatting unless there is a serious hardware or software malfunction. In the event it has been determined that the low level format is corrupted, proceed as follows:

1. At the DOS prompt, run the PROMDISK-Chip low level format utility PDCFMT.EXE located on the distribution diskette in the PDCHIP subdirectory.
2. Install a bootable floppy diskette in drive A and boot the system.
3. At the DOS prompt type SYS C: to transfer a bootable copy of DOS to PROMDISK-Chip.
4. Remove the floppy diskette from drive A: and reboot the system from PROMDISK-Chip.

**CAUTION: Do Not use the DOS Fdisk utilities on the PROMDISK-Chip.**

## SECTION 5 - INSTALLATION

---

This section describes the procedures for installing the IHV-745E All-In-One Single Board Computer into your system. The following is a list of typical peripherals required to build a minimum system:

- Passive Backplane and Power Supply
- IBM PC/AT Type Keyboard
- Display Monitor
- Floppy or Hard Disk with MS-DOS, ROM-DOS, or PROMDISK-Chip Disk Emulator

### INSTALLING THE SIMMS

When installing or removing the DRAM SIMMs, be sure to first touch a grounded surface to discharge any static electricity from your body. Use the following procedure to install the SIMMs:

1. Insert the first SIMM edge connector at a slight angle into the SIMM1 socket closest to the center of the board. Note that the SIMMs are keyed and will only go in one way.
2. Push the SIMM back into the connector carefully until it snaps into place.
3. Check to make sure the SIMM is inserted securely.
4. If required, insert the second SIMM edge connector at a slight angle into the SIMM2 socket.

To remove a SIMM, use a small screw driver to pull back the holding clip on each side of the SIMM and lift the SIMM from the connector.

### INSTALLING THE CPU

When installing or removing the CPU, be sure to first touch a grounded surface to discharge any static electricity from your body. Use the following procedure to install the CPU:

1. Open the ZIF socket by lifting the release arm to its vertical position causing the sliding base plate to move to the open position.
2. Align pin one (white dot or beveled edge) on the CPU chip with pin one of the ZIF (zero insertion force) socket. Note pin 1 of the ZIF socket is located on the lower left-hand side of the socket. To complete the installation, gently press the CPU chip into place and return the release arm to its locked position.
3. Double-check the insertion and orientation of the chip before applying power. Improper installation will result in permanent damage to the chip. Refer to Appendix E for CPU speed and configuration jumpers.

To remove the CPU chip, open the ZIF socket by lifting the release arm to its vertical position and gently remove the chip.

### INSTALLING THE PROMDISK-CHIP

When installing or removing the PROMDISK-Chip, be sure to first touch a grounded surface to discharge any static electricity from your body. Use the following procedure to install the PROMDISK-Chip:

1. Align pin one (white dot or square pad) on the PROMDISK-Chip with pin one of the PROMDISK-

Chip socket on the CPU board.

2. Push the PROMDISK-Chip into the socket carefully until it is fully seated.
3. Check to make sure the PROMDISK-Chip is installed securely, and there are no bent pins.
4. Double-check the insertion and orientation of the chip before applying power. **Improper installation will result in permanent damage.**

To remove the PROMDISK-Chip, insert a small screwdriver between the PROMDISK-Chip and the socket and gently pry around the edge until the PROMDISK-Chip is released from the socket.

## COMPLETING THE INSTALLATION

To complete the installation, the following steps should be followed:

1. Set the configuration jumpers in accordance with Appendix E.
2. Install the IHV-745E SBC into one of the I/O slots in a passive backplane.
3. Connect the applicable I/O cables and peripherals, i.e. floppy disk, IDE hard disk, monitor, keyboard, power supply, etc.
4. Connect an IBM PC compatible keyboard.
5. Turn power on to the display monitor.
6. Turn power on to the backplane power supply.
7. After the BIOS sign-on message is displayed, press the **Del** key to enter the Setup Utility.
8. Reconfigure the IHV-745E CMOS using the internal SETUP.
9. Boot the system.




## APPENDIX A - SPECIFICATIONS

This appendix lists the specifications for the IHV-745E All-In-One Single Board Computer.

CPU:	Supports: Intel Pentium/MMX up to 233MHz, and AMD K6-2 (66MHz clock) and Cyrix 6x86 processors up to 350MHz.
Co-processor:	Internal to the Pentium Chip
Memory:	System Memory Expandable to 128M-bytes. Supports: 256Kx36, 512Kx36, 1Mx36, 2Mx36, 4Mx36, 8Mx36, or 16Mx36 SIMMs using two 72-pin SIMM sockets. Both standard fast page mode (FPM) and high performance EDO DRAM is supported. Internal 8K-byte Data and 8K-byte Instruction Cache Memory (16K for MMX). 512K-bytes of High Speed pipelined burst mode Cache Memory.
BIOS:	AMI Plug-n-Play BIOS Flash EPROM.
Clock/Cal:	PC/AT Compatible with on-board Lithium battery back-up
I/O Bus:	IBM PC/AT Compatible 98-pin Edge Connector
DMA:	7 Channels (4 8-bit & 3 16-bit) PCI Ultra DMA/33
Timers:	3 Programmable
Interrupts:	16
Reset:	Controlled by on-board power detector with provisions for external reset switch at header CN38
I/O Ports:	2 - RS-232 Serial Ports (CN27 at rear connector, and CN28 header) 1 - Parallel Printer Port (at connector CN26) 1 - PS2 Keyboard Port (at header CN37 and at rear PS2 type connector CN36) 1 - On-board Speaker with Speaker Port (CN2) 1 - Dual 3.5"/5.25" Floppy Disk Port (CN25) 1 - IDE Hard Disk Port at CN21 1 - PS2 Mouse Port (CN35 header and at rear PS2 type connector CN36) 1 - IDE LED (CN32) 1 - Universal Serial Bus Port (header JP41) 1 - Fan Connector (CN24) 1 - Ethernet Port (CN30 at the rear connector)
PCI Video Port:	1 - PCI VGA/LCD Video Port (at rear connector CN29 and LCD header CN3) Chipset: C&T 65555 VRAM: 2MB VRAM Resolution: 1280 x 1024, 256 Colors 1024 x 768, 64K Colors 800 x 600, 16M Colors
Speed:	100-350MHz jumper selectable.
Benchmark:	LANDMARK v2.0 = 3037MHz for 300MHz AMD K6
Size:	Half Size AT board 7.08"L X 4.8"H
Weight:	12 Oz.
Power:	+5VDC @ 5A, +12VDC @ 0.170A, -12VDC @ .02A

# APPENDIX B - BOARD OUTLINE

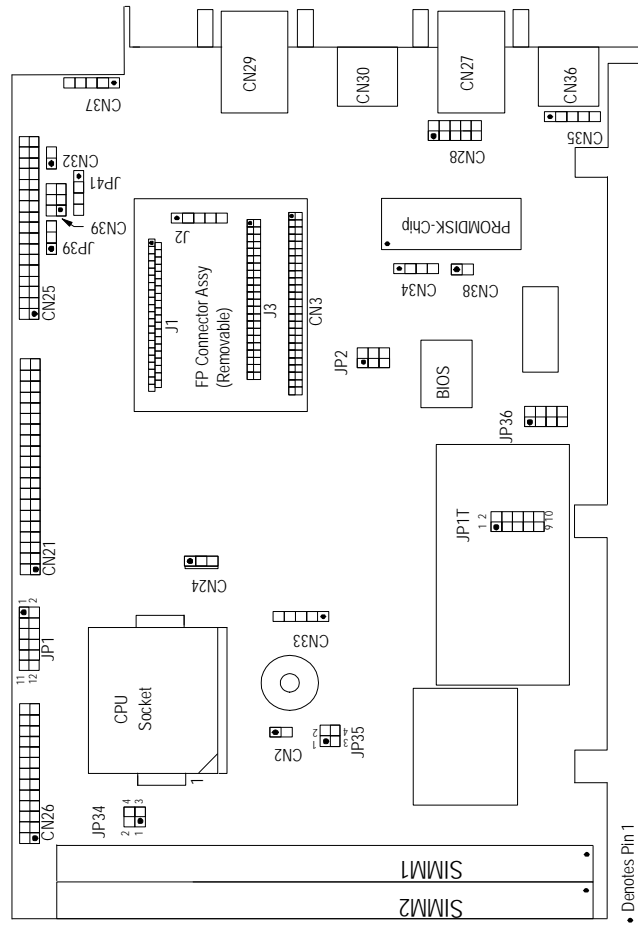

## APPENDIX C - MEMORY AND I/O MAPS

---

The following is the memory map for the IHV-745E SBC. The addresses are fully PC/AT compatible, unless otherwise specified.

**IHV-745E SBC Memory Map**

Address	Used For	Size
00000H - 003FFH	Interrupt Vectors	1.0K
00400H - 005FFH	BIOS Values	0.5K
00600H - 9FFFFH	User RAM (DOS)	638.5K
A0000H - AFFFFH	Reserved for VGA	64.0K
B0000H - B7FFFH	Video RAM (MDA)*	32.0K
B8000H - BFFFFH	Video RAM (CGA)*	32.0K
C0000H - C3FFFH	Reserved	16.0K
C4000H - C7FFFH	EMS Window	16.0K
C8000H - DFFFFH	ROM Scan Devices*	96.0K
E0000H - FFFFFH	System BIOS	128.0K
100000H - 7FFFFFFFH	User Memory	128.0M

*\*External to the IHV-745E*

The following is the I/O map for the IHV-745E SBC. I/O addresses are fully PC/AT compatible, unless otherwise specified.

**IHV-745E SBC I/O Map**

Address	Function
000H - 01FH	DMA Controller #1
020H - 021H	Interrupt Controller #1
022H - 023H	Configuration Address Register
040H - 05FH	System Timers
060H - 063H	Keyboard, Status, & System Control
070H - 07FH	Clock/Calendar & CMOS Ram Access
080H - 083H	DMA Page Register
0A0H - 0BFH	Interrupt Controller #2
0C0H - 0DFH	DMA Controller #2
0F0H	Clear Math Co-processor Busy
0F1H	Reset Math Co-processor
1F0H - 1F8H	IDE Hard Disk
278H - 27FH	Parallel Printer Port LPT2
2E8H - 2EFH	Serial Port COM4
2F8H - 2FFH	Serial Port COM2
378H - 37FH	Parallel Printer Port LPT1
3BCH - 3BFH	Parallel Printer Port LPT3
3E8H - 3EFH	Serial Port COM3
3F0H - 3F7H	Floppy Disk Controller
3F8H - 3FFH	Serial Port COM1

## APPENDIX D - CONNECTORS

---

### CN37 Keyboard Header/Connector

Pin	Signal
1	KBCLK
2	KBDATA
3	N/C
4	GND
5	+5VDC

### CN36 Keyboard/Mouse Connector (PS2 type)

Pin	Signal
1	KBDATA
2	MADATA
3	GND
4	+5VDC
5	KBCLOCK
6	MCLOCK

### CN35 Mouse Header/Connector

Pin	Signal
1	MADATA
2	N/C
3	GND
4	+5VDC
5	MCLOCK

### CN25 Floppy Disk Port Connector

Pin	Signal Name
2	RPMLC
4	Not Used
6	Not Used
8	INDEX/
10	MOTOR0/
12	DRIVE SELECT1/
14	DRIVE SELECT0/
16	MOTOR1/
18	DIRECTION
20	STEP/
22	WRITE DATA/
24	WRITE GATE/
26	TRACK0/
28	WRITE PROTECT/
30	READ DATA/
32	HEAD SELECT/
34	DISK CHANGE/

All odd numbered pins are GND

### CN21 EIDE Hard Disk Port Connector

Pin	Signal	Pin	Signal
1	IDERST/	2	GND
3	IDED7	4	IDED8
5	IDED6	6	IDED9
7	IDED5	8	IDED10
9	IDED4	10	IDED11
11	IDED3	12	IDED12
13	IDED2	14	IDED13
15	IDED1	16	IDED14
17	IDED0	18	IDED15
19	GND	20	Not Used
21	Not Used	22	GND
23	IDEIOW/	24	GND
25	IDEIOR/	26	GND
27	Not Used	28	IDEALE
29	Not Used	30	GND
31	IRQ	32	IOCS16/
33	IDESA1	34	Not Used
35	IDESA0	36	IDESA2
37	HDCS0/	38	HDCS1/
39	IDEACT/	40	GND

### CN26 Printer Interface Connector

Pin	Signal	Pin	Signal
1	STROBE/	14	AUTOFD/
2	PDAT0	15	ERROR/
3	PDAT1	16	INIT/
4	PDAT2	17	SLCTIN/
5	PDAT3	18	GND
6	PDAT4	19	GND
7	PDAT5	20	GND
8	PDAT6	21	GND
9	PDAT7	22	GND
10	ACK/	23	GND
11	BUSY	24	GND
12	PE	25	GND
13	SLCT	26	

### CN27 Serial Port #1 9-pin Sub D Connector

Pin	Signal Name
1	CARRIER DETECT #1
2	RECEIVE DATA #1
3	TRANSMIT DATA #1
4	DATA TERMINAL READY #1
5	GND
6	DATA SET READY #1
7	REQUEST TO SEND #1
8	CLEAR TO SEND #1
9	RING INDICATOR #1

### CN28 Serial Port #2 10-pin Header/Connector

Pin	Signal Name
1	CARRIER DETECT #2
2	DATA SET READY #2
3	RECEIVE DATA #2
4	REQUEST TO SEND #2
5	TRANSMIT DATA #2
6	CLEAR TO SEND #2
7	DATA TERMINAL READY #2
8	RING INDICATOR #2
9	GND
10	N/C

### CN29 VGA Display Connector (15-pin Sub-D)

Pin	Signal	Pin	Signal
1	RED	2	GREEN
3	BLUE	4	N/C
5	GND	6	GND
7	GND	8	GND
9	N/C	10	GND
11	N/C	12	DDDA
13	HSYNC	14	VSYNC
15	DDCK		

### CN3 LCD Interface Connector

Pin	Signal	Pin	Signal
1	VPCLK	2	P33
3	P34	4	P31
5	P35	6	P32
7	P30	8	P28
9	P29	10	P27
11	P25	12	P26
13	P24	14	P21
15	P23	16	P22
17	P16	18	P20
19	P17	20	P18
21	P19	22	P14
23	P13	24	P12
25	P15	26	P11
27	P7	28	P10
29	+5V or +3.3V	30	+5V or +3.3V
31	P9	32	P8
33	P4	34	P6
35	P3	36	P5
37	P2	38	P1
39	M	40	P0
41	SHFTCLK	42	ENABKL
43	FPVDD	44	FLM (V)
45	FPVEE	46	LP (H)
47	GND	48	GND
49	+12V	50	+12V

### J3 44-pin LCD Interface Connector

Pin	Signal	Pin	Signal
1	+12V	2	+12V
3	GND	4	GND
5	+5V or +3.3V	6	+5V or +3.3V
7	FPVVEE	8	GND
9	P0	10	P1
11	P2	12	P3
13	P4	14	P5
15	P6	16	P7
17	P8	18	P9
19	P10	20	P11
21	P12	22	P13
23	P14	24	P15
25	P16	26	P17
27	P18	28	P19
29	P20	30	P21
31	P22	32	P23
33	GND	34	GND
35	SHFCLK	36	FLM
37	M	38	LP
39	GND	40	ENABKL
41	N/C	42	N/C
43	FPVDD	44	+5V or +3.3V

### J1 41-pin LCD Interface Connector

Pin	Signal	Pin	Signal
1	P20	2	GND
3	P16	4	+5V or +3.3V
5	P21	6	P0
7	P17	8	P8
9	P22	10	P1
11	P18	12	P9
13	P23	14	P2
15	P19	16	P10
17	+5V or +3.3V	18	P3
19	FLM	20	P11
21	M	22	P4
23	LP	24	P12
25	SHFCLK	26	P5
27	+5V or +3.3V	28	P13
29	+5V or +3.3V	30	P6
31	ENABKL	32	P14
33	FPVDD/	34	P7
35	FPVVEE	36	P15
37	GND	38	+12V
39	GND	40	+12V
41	N/C		

### J2 Backlight Power Connector

Pin	Signal
1	N/C
2	GND
3	+12V
4	GND
5	FPVVEE

### CN2 Speaker Port Header/Connector

Pin	Signal Name	Description
1	+5VDC	Connect to Speaker (+)
2	SPEAKER	Connect to Speaker (-)

### CN38 Reset Header/Connector

Pin	Signal Name	Description
1	RESET/	Connect to switch, ground this pin to reset
2	GND	Ground

### CN32 IDE LED Header/Connector

Pin	Signal Name	Description
1	+5VDC	Connect to IDE LED anode (+)
2	IDE LED	Connect to IDE LED cathode (-)

### CN24 CPU Fan Header/Connector

Pin	Signal Name	Description
1	N/C	No Connection
2	+12V	+12VDC Fan Power
3	Ground	Ground

### CN39 Ethernet LED Connector

Pin	Signal
1	+5VDC
2	10Mbps
3	+5VDC
4	100Mbps
5	+5VDC
6	ACTIVE

### J30 Ethernet RJ45 Connector

Pin	Signal
1	TX+
2	TX-
3	RX+
4	N/C
5	N/C
6	RX-
7	N/C
8	N/C

### CN34 External Battery Connector

Pin	Signal
1	EXT +
2	N/C
3	N/C
4	EXT -

Note: Remove jumper from 2-3 when using external battery.



### JP41 USB Port Connector

Pin	Signal
1	VCC
2	DATA-
3	DATA+
4	GND

## APPENDIX E - CONFIGURATION JUMPERS

---

### JP1 CPU Clock Jumper

CPU Clock	PCI Clock	11-12	9-10	1-2
66.8MHz	33.4MHz	OFF	OFF	OFF
60MHz	30MHz	OFF	OFF	ON
75MHz	37.5MHz	OFF	ON	OFF
55MHz	27.5MHz	OFF	ON	ON
68.5MHz	34.25MHz	ON	OFF	OFF
83.33MHz	33.3MHz	ON	OFF	ON
75MHz	30MHz	ON	ON	OFF
83.33MHz	41.65MHz	ON	ON	ON

### JP1 CPU Clock Multiplier Jumper

Multiplier	3-4	5-6	7-8
1.5X	OFF	OFF	OFF
2X	ON	OFF	OFF
2.5X	ON	ON	OFF
3X	OFF	ON	OFF
3.5X	OFF	OFF	OFF
4X	ON	OFF	ON
4.5X	ON	ON	ON
5X	OFF	ON	ON
5.5X	OFF	OFF	ON

### JP1T CPU Core Voltage Jumper

Voltage	1-2	3-4	5-6	7-8	9-10
3.5V	ON	ON	ON	ON	OFF
3.4V	OFF	ON	ON	ON	OFF
3.2V	OFF	OFF	ON	ON	OFF
2.9V	ON	OFF	OFF	ON	OFF
2.8V	OFF	OFF	OFF	ON	OFF
2.2V	OFF	ON	OFF	OFF	OFF
2.0V	OFF	OFF	OFF	OFF	OFF

### JP34 & JP35 Dual/Single Voltage Select Jumpers

CPU	JP34 1-2	JP34 3-4	JP35 1-2	JP35 3-4
Pentium	ON	ON	OFF	OFF
Pentium/MMX AMD K6 Cyrix 6x86MX Dual Voltage	OFF	OFF	ON	ON

### JP36 PROMDISK-Chip Address Jumper

ADDRESS	1-2	3-4	5-6
CE00H	ON	OFF	OFF
D600H	OFF	ON	OFF
DE00H	OFF	OFF	ON

### CN34 Clear CMOS Setup Jumper

2-3	Normal Operation (Default)
3-4	Clear CMOS Setup

### JP39 LCD Voltage Jumper

2-3	+5V (Default)
1-2	+3.3V

### JP2 BIOS Programming Jumper

Flash Type	JP2
+5V 2MB	3-5 & 4-6
+12V 1MB	1-3 & 2-4

## APPENDIX F - BIOS ERROR BEEP CODES

---

During the POST (Power On Self Test) routines, which are performed each time the system is powered on, errors may occur.

**Nonfatal errors** are those which, in most cases, allow the system to continue the boot up process. The error messages normally appear on the screen.

**Fatal errors** are those which will not allow the system to continue the boot-up procedure. If a fatal error occurs, you should consult with MCSI Customer Service for possible repairs.

These fatal errors are communicated through a series of audible beeps. The numbers on the fatal error list below correspond to the number of beeps for the corresponding error. All errors listed, with the exception of number eight, are fatal errors.

No. of Beeps	Error Message
1	<b>Refresh Failure</b> - The memory refresh circuitry is faulty.
2	<b>Parity Error</b> - A parity error was detected in the first 64K block of system memory.
3	<b>Base 64KB Memory Failure</b> - A memory failure occurred within the first 64KB of memory.
4	<b>Timer Not Operational</b> - Timer #1 has failed to function properly.
5	<b>Processor Error</b> - The CPU chip has generated an error.
6	<b>8042-Gate A20 Failure</b> - The keyboard controller (8042) contains the Gate A20 switch which allows the CPU to operate in virtual mode. This error message means that the BIOS is not able to switch the CPU into protected mode.
7	<b>Processor Exception Interrupt Error</b> - The CPU chip has generated an exception interrupt.
8	<b>Display Memory Read /Write Error</b> - The video adapter is either missing or the video memory is faulty. PLEASE NOTE: This is not a fatal error.
9	<b>ROM Checksum Error</b> - The ROM checksum value does not match the value encoded in the BIOS.
10	<b>CMOS Shutdown Register Read/Write Error</b> - The shutdown register for the CMOS memory has failed.
11	<b>Cache Memory Read/Write Error</b> - A Cache Memory failure occurred, do not enable the Cache Memory to resume operation.

## *APPENDIX G - LIST OF FLAT PANEL TYPES SUPPORTED*

---

The IHV-745E CPU BIOS supports the following generic flat panel display types. Since the timing and interface requirements are different for each display type and manufacturer, it is possible that the generic panel setting may not operate correctly for your particular display. If this is the case, please contact the factory for assistance.

<b>No.</b>	<b>Description</b>
1	1024x768 Dual Scan STN Color
2	1280x1024 TFT
3	640x480 STN
4	800x600 STN
5	640x480 TFT
6	640x480 18bit
7	1024x768 TFT
8	800x600 TFT
9	800x600 TFT
10	800x600 TFT
11	800x600 STN
12	800x600 STN
13	1024X768 TFT
14	1280x1024 STN
15	1024x600 STN
16	1024x600 TFT